


PRODUCT DESCRIPTION

- Portable stick welder
- Advanced IGBT technology
- Voltage compensation
- Thermal protection
- Stepless current setting
- Hot start, anti-sticking, arc force
- Available for rutile and basic electrode
- Continuous welding
- Lift Arc TIG as options
- Full Digital technology



■ DETAIL DISPLAY



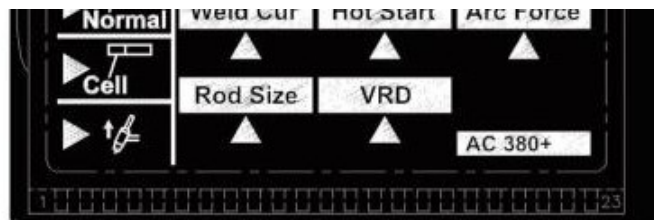

■ TECHNICAL PARAMETER

Model	DSTICK 120	DSTICK 140	DSTICK 160	DSTICK 180	DSTICK 200
Input Power (V)	230	230	220	220	220
Rated Input Current (A)	14.5	13.3	26.5	26.5	26.5
Rated Input Capacity (kVA)	3.3	3.1	4.1	5.7	6.3
Rated Open Circuit Voltage(V)	64	64	82	82	82
Welding Current Adjustment Range(A)	20-120	20-140	20-160	20-180	20-200
Rated Output(A) (20°C) / (40°C)	60%/15%@140	25%/10%@140	60%/25%@160	50%/20%@180	50%/15%@200
Weight (kg)	2.5	2.5	3.5	3.5	3.8
Electrode Diameter (mm)	1.6-3.2	1.6-3.2	1.6-3.2	1.6-3.2	1.6-4.0
LxWxH (mm)	235x105x180	235x105x180	290x185x230	290x185x230	290x185x230

■ PARTS

ACCESSORIES



OPTIONAL

