

PRODUCT DESCRIPTION

- Portable Stick Welder
- New Generation IGBT Inverter Technology
- Built-in Anti-Sticking and Hot Start
- Ideal for welding of carbon steels, low-alloy steels and stainless steels
- Excellent arc characteristics and performance with electrodes in diameters of 1.6 to 5.0 mm. Rutile (E 6013) and Basic (E 7018) type electrodes
- Thermal protection and power indicator light


50/60
Hz1
PHASE

■ PRODUCT DESCRIPTION

- Equipped with voltage protection this improves the reliability
- Easy-to-use and user-friendly control panel
- Easy welding cable connections with European type quick connectors
- Fan cooling system
- IP21S Protection Class
- Lightweight, Small and Compact Design
- Weight is only 5.5 Kg.
- Dimensions (cm.) (L×W×H) 40 × 15.4 × 30

■ DETAIL DISPLAY



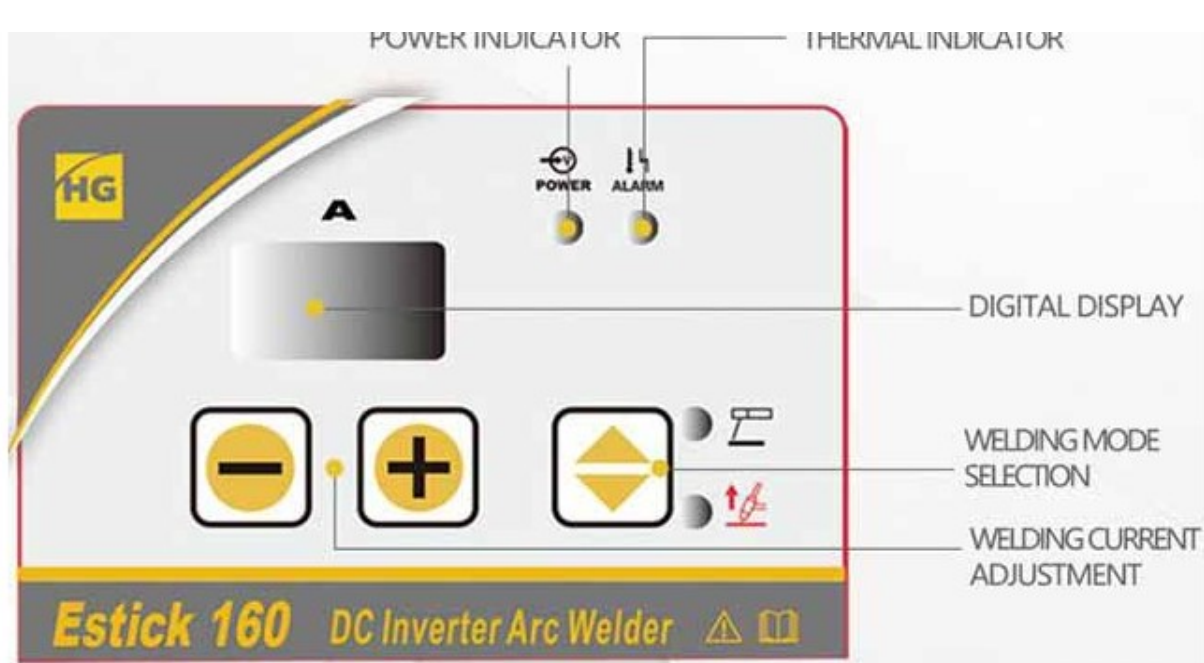

■ TECHNICAL PARAMETER

Model	ESTICK 160 III	ESTICK 200 III
Input Power (V)	230	230
Max Input Current(A)	31	41
Rated Input Capacity(kVA))	6.8	9.0
Rated Open Circuit Voltage(V)	78	78
Welding Current Adjustment Range(A)	20-160	20-200
Rated Output(A)(20°C) / (40°C)	50%25%@160	40%15%@200
Weight(kg)	5.5	5.5
Electrode Diameter (mm)	1.6-4.0	1.6-5.0
LxWxH (mm)	400 x 154 x 300	400 x 154 x 300

■ PARTS

ACCESSORIES



OPTIONAL

