


HIGERMAX STICK[SMAW]



PRODUCT DESCRIPTION

Three phase, DC output
On wheel, fan cooled
Stepless current setting
Thermal protection
Rutile, basic, cellulosic electrode

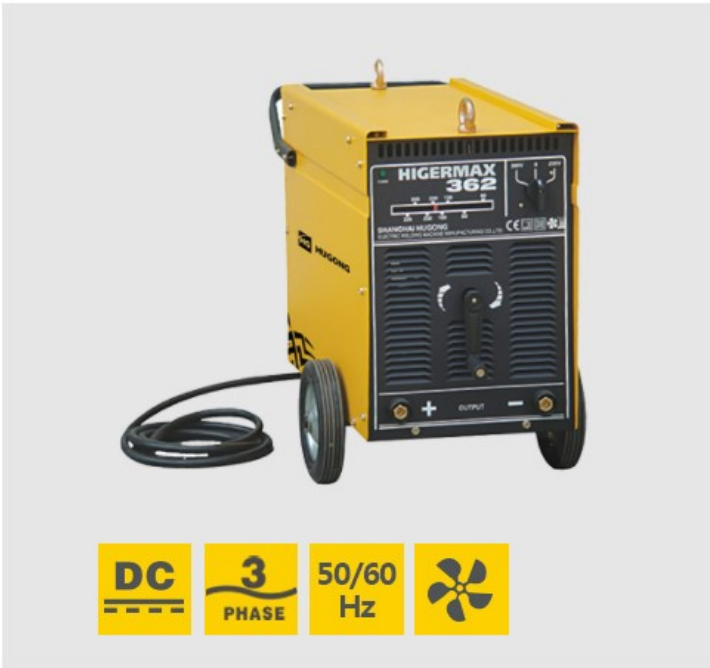

TECHNICAL PARAMETER

Model	HIGERMAX 282	HIGERMAX 362	HIGERMAX 402
Input Power (V)	230/400	230/400	230/400
Rated Input Current (A)	45/26	54/31	66/38
Rated Input Capacity (kVA)	18	21.5	25.1
Rated Open Circuit Voltage(V)	70	62	62
Welding Current Adjustment Range(A)	40-250	65-325	80-400
Rated Output(A) (20°C) / (40°C)	35%@250	35%@325	35%@400
Weight (kg)	83	104	110
Electrode Diameter (mm)	2.5-5.0	2.5-6.0	3.2-8.0
LxWxH (mm)	740x450x615	760x470x650	760x470x650

PARTS

ACCESSORIES



OPTIONAL

