

PRODUCT DESCRIPTION



- Portable, Dual Voltage (110 V / 220 V) Stick / DC TIG Welder
- New Generation IGBT Inverter Technology
- Built-in anti-sticking, hot start and arc force
- High Duty Cycle and welding capacity
- Pre-set welding current for each welding electrode diameter (2 mm. to 4mm)
- Ideal for welding of carbon steels, low-alloy steels and stainless steels
- Excellent welding performance with Rutile (E 6013), Basic (E 7018) as well as Cellulosic Type Electrodes (E 6010) in diameters of 2 mm. to 4 mm.
- Easy-to-use and user-friendly control panel
- Welding electrode diameter selection button
- Stepless welding current + / - % 15 adjustment knob
- Welding mode SMAW/DC TIG selection button




■ PRODUCT DESCRIPTION

- Digital ampermeter and Power Indicator light
- Equipped with thermal protection and it's indicator light.
- Equipped with voltage protection this improves the reliability.
- Easy welding cable connections with European type quick connectors.
- Fan cooling system
- IP21S Protection Class
- Lightweight, small and patented compact design
- Weight is only 4.8 Kg.
- Dimensions (cm.) (L×W×H) 39.5× 15.4× 29.9

■ PRODUCT DESCRIPTION

- Digital ampermeter and Power Indicator light
- Equipped with thermal protection and it's indicator light.
- Equipped with voltage protection this improves the reliability.
- Easy welding cable connections with European type quick connectors.
- Fan cooling system
- IP21S Protection Class
- Lightweight, small and patented compact design
- Weight is only 4.8 Kg.
- Dimensions (cm.) (L×W×H) 39.5× 15.4× 29.9

■ DETAIL DISPLAY

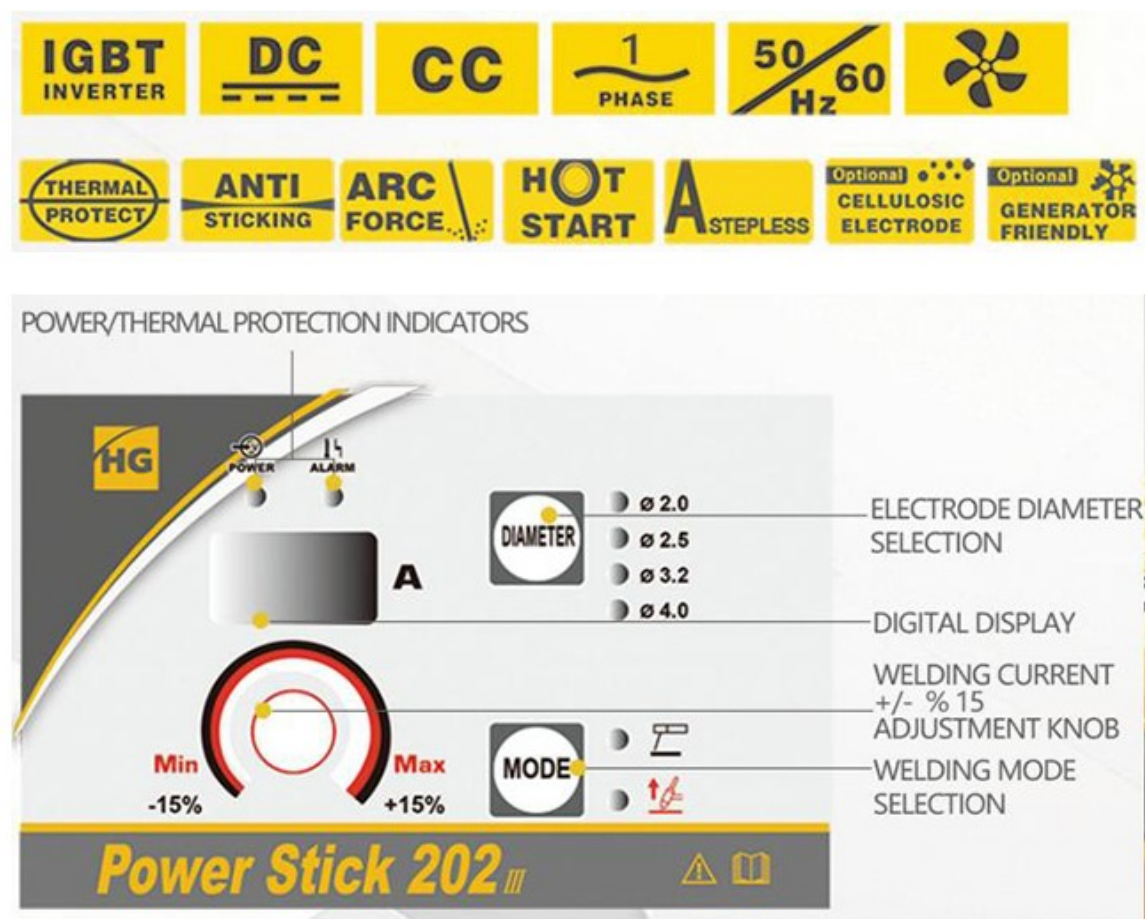

■ TECHNICAL PARAMETER

Model	POWER STICK 162III		POWER STICK 202III	
Input Power (V)	220	110	220	110
Max Input Current (A)	30	35	40	42
Rated Input Capacity (kVA)	6.6	3.9	8.8	4.6
Rated Open Circuit Voltage(V)	78	78	78	78
Welding Current Adjustment Range(A)	MMA41-160 TIG15-160	MMA41-130 TIG15-130	MMA41-200 TIG15-200	MMA41-130 TIG15-130
Rated Output(A) (20°C) / (40°C)	35%@160	100%@130	30%@200	100%@130
Weight (kg)	4.8	4.8	5.1	5.1
LxWxH (mm)	395x 154x 299	395x 154x 299	395x 154x 299	395x 154x 299

■ PARTS

ACCESSORIES



OPTIONAL

